

# Seafox 4





MAIN CRANE CAPACITY 300 t | ACCOMMODATION 153 POB | MAX WATER DEPTH 45 m | DECK SPACE 900 m<sup>2</sup>

Seafox 4 is a six-legged, self-elevating jack-up unit for accommodation, construction, maintenance, and well services. The unit was built to American Bureau of Shipping (ABS) classification requirements and is designed to operate throughout the year in water depths of up to 45 meters. The unit offers permanent accommodation for 153 Persons on Board (POB) and has an accepted UK Safety Case for accommodation, maintenance, and well-service activities in the Dutch and UK sectors. Life on board is pleasant and positive thanks to the unit's leisure facilities and health and well-being amenities.

# Seafox 4

## Accommodation & Multi-support Unit

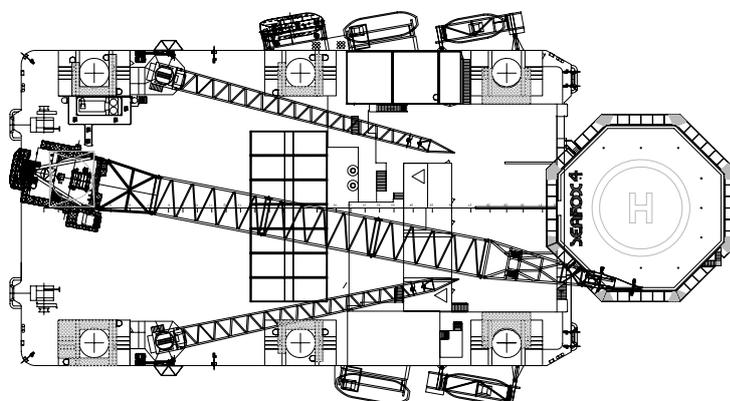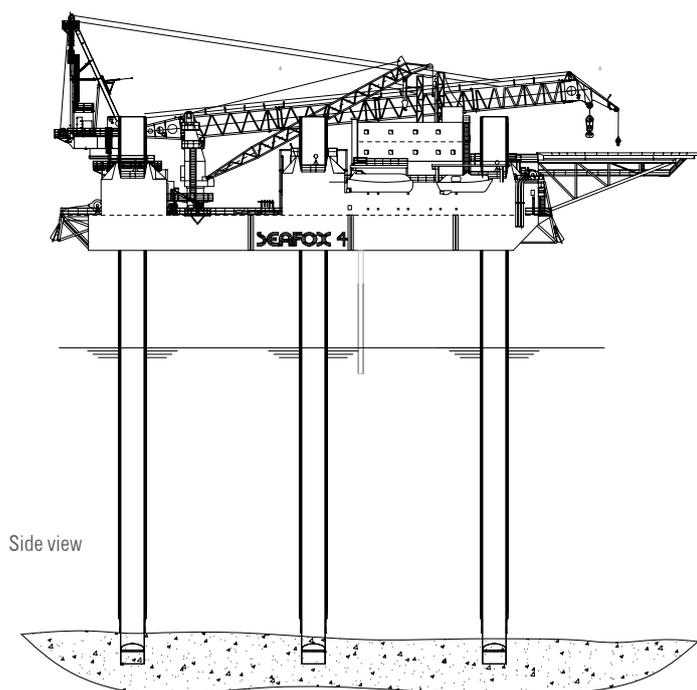

### GENERAL

Name	Seafox 4
Flag / P.O.R.	Isle of man / Douglas
Design	Transocean
Year built / Conversion date	1976 / 2015
Last Special Survey	2020
Class	ABS $\ddagger$ A1-Self Elevating Unit
Callsign	2BIF7
IMO nr.	8756148

### DIMENSIONS

Length	68.79 m
Max length	97.25 m
Breadth	52.78 m
Depth	5.44 m
Loadline draft	4.19 m

### DECK

Deck capacity	3.7 t/m <sup>2</sup> , 20.0 t/m <sup>2</sup>
Deck space	900 m <sup>2</sup>

### LEGS

Number of legs	6
Max Water Depth	45.7 m
Length of legs	84.30 m
Type of legs	Circular closed tube

### HELICOPTER DECK

Suitable	EC 225, S-92, S61-N including refueling
D-value	22 m
Safe Working Load (Tonnes)	9.3 t
Compliant	Cap 437, BSL D 5-1, HCA

### POWER GENERATION

Electricity Diesel/Electric	3x 600 kW, 440 V / 60 Hz
Emergency Diesel Generator	1x 250 kW

Details in this specification are correct at the time of publishing. However they may differ from time to time due to project specific alterations. Upon request project specific arrangements and specifications can be provided.

### JACKING SYSTEM

Type jacking system	Electric Rack & Pinion
Capacity	2200 t (centre legs) 2100 t (corner legs)
Average speed	0.3 m per min

### VARIABLE LOAD

Operational	2200 t (elevated) 1100 t (jacking)
-------------	---------------------------------------

### LIFE SAVING EQUIPMENT

Lifeboats/Type	2x 61 person, 1x 50 person, 1x 60 person 1x 44 pers (98kg)
Liferafts/Type	4x 25 person, 4x 20 person

### ENVIRONMENTAL CRITERIA

Water depth (LAT)	45.7 m
Wave height	14.5 m
Airgap	18 m
Period	10.2 sec
Current	0.5 m/s
Wind speed	45.0 m/s
Soil penetration	3.0 m

### MOORING SYSTEM

Mooring winches	4x single drum, 30 t, 550 m wire
Achors	4x 5.0 t
Anchor type	Delta Flipper

### CRANES

Port Crane	Liebherr BOS Crane Max: 50 t @ 12 m radius Min: 5 t @ 36.6 m radius
Starboard Crane	Liebherr BOS Crane Max: 50 t @ 12 m radius Min: 5 t @ 36.6 m radius
Stern Cranes	Kenz 300 crane Max: 300 t @ 26 m radius

### ACCOMMODATION

Capacity	153
Facilities:	Galley, Mess room, Stores, Recreation rooms, Gym, Change room, Hospital facilities, Conference room, Offices